

CV1052T

10 Inch 2-Way Full Range Loudspeaker System

Professional Series

Key Features:

- ► Specially designed 10" high performance woofer provides greater power handling and is fitted with demodulating aluminum ring for lower distortion and power compression
- ► Two (2) 3" paper cone tweeters provide excellent high-frequency response and superb vocal reproduction
- MDF (medium density fiberboard) enclosure with vinyl finish provides grand appearance and durability
- Precisely designed crossover optimizes the frequency response and provides smooth and accurate music reproduction
- Built-in high quality multi-tap 70V/100V transformer
- ► 150°×120°coverage pattern for even and smooth response on and off axis
- ▶ Ideal for installations with limited ceiling height
- Rotatable JBL COMMERCIAL logo for easy coherence to your installation
- ▶ White (-WH) color available upon request

Applications:

- ► Sound reinforcement for restaurants, conference rooms, hotels, cafes, halls, school rooms, etc.
- High-performance satellite speaker for use with subwoofers.

CV1052T is a two-way full-range speaker designed for restaurants, conference rooms, music cafes, hotels, etc. Its especially wide coverage pattern (150°×120°) makes it a perfect choice for installations where the ceiling height is relatively limited.

CV1052T utilizes a 10" woofer and two (2) 3" paper cone tweeters. The 10" woofer features a non-pressed long fiber pulp cone with foam surround providing necessary stiffness and high reliability. The aluminum demodulating cooling ring reduces distortion and power compression. Two (2) 3" paper cone tweeters provide excellent high-frequency response and superb vocal reproduction.

With a built-in high-performance multi-tap acoustic transformer (70V/100V), CV1052T realizes lower distortion, broader frequency range, flatter frequency response and lower insert loss. Precisely designed crossover optimizes the frequency response and provides smooth and accurate music reproduction.

The enclosure constructed of MDF with vinyl laminated finish presents grand and elegant appearance. Two (2) high-strength M10 attachment points guarantee stability of suspension installations. The integrated grille with V-shape pattern adds a distinctive element to the overall grand and elegant appearance of the loudspeaker in addition to protecting the components of loudspeaker from damage.



Specifications:

System:		
-	System Type:	10", 2-way, bass-reflex
	Frequency Range (-10 dB) ¹ :	60 Hz – 18 kHz
	Frequency Response(±3dB)1:	70 Hz – 15 kHz
	Sensitivity(1W@1m)1:	91 dB
	Nominal Impedance:	$8\Omega({ m at}~8\Omega~{ m tap}~{ m setting})$
	Maximum SPL(1m) ² :	115 dBcontinuous average (121 dB peak) (at 8Ω tap setting)
	Power Rating ³ : (Continuous/Program/Peak)	250 W / 500 W / 1000 W(at 8Ω tap setting)
	Coverage:	150°×120° (H × V)
	Transformer Tap:	8 Ohms, 70 V (12.5 W / 25 W / 50 W / 100 W) 100 V (25 W / 50 W / 100 W)
	Insert Loss:	<1.0 dB at any tap setting
Transducers:		
	LF Driver:	1 × 10" woofer
	HF Driver:	2×3 " paper cone tweeter
Physical:		
	Enclosure:	Trapezoid,15 mm MDF
	Suspension:	2 × M10 threaded suspension points
	Finish:	Vinyl laminated, black. White (-WH) available upon request.
	Grille:	Powder coated, 1.0 mm perforated steel
	Input Connector:	Dual RED/BALCK connector in parallel for loop-through.
	Dimensions ($H \times W \times D$):	296 mm × 507.8 mm × 311 mm
		$(11.7in \times 20.0 in \times 12.2 in)$
	Net Weight:	12.0 kg (26.4 lbs)

¹ Full space (4π) conditions


JBL continually engages in research related to product improvement. Some materials, production methods and design refinements are introduced into existing products without notice as a routine expression of that philosophy. For this reason, any current JBL product may differ in some respect from its published description, but will always equal or exceed the original design specifications unless otherwise stated.

² Calculated maximum SPL based on rated power handling


³ IEC standard, pink noise with 6dB crest factor for 2 hours

► CV1052T 10 Inch 2-Way Full Range Loudspeaker System

Frequency Response:

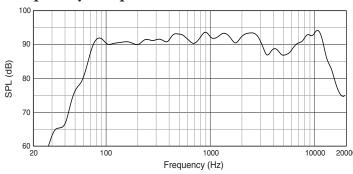


Beamwidth:

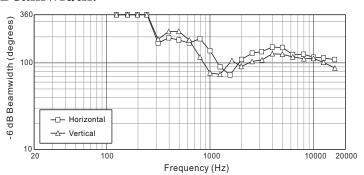

Dimensions:

Dimensions in mm (inch)

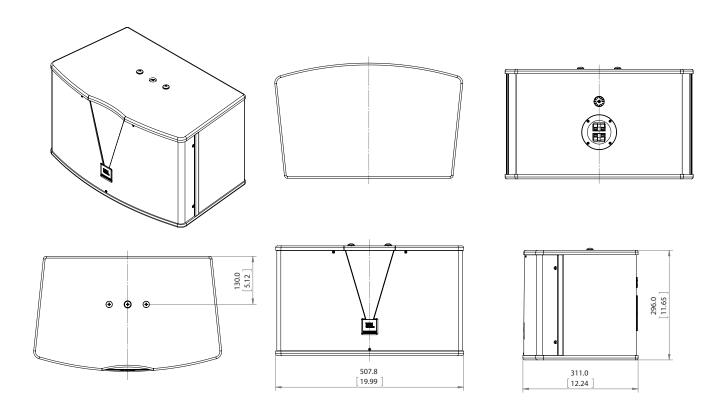



JBL Professional 8500 Balboa Boulevard, P.O. Box 2200 Northridge, California 91329 U.S.A.