



MICROFLEX SERIES
WIRED MICROPHONE

MX391 USER GUIDE

Le Guide de l'Utilisateur

Bedienungsanleitung

Guia del Usuario

Guida dell'Utente

Manual do Usuário

取扱説明書



© 2016 Shure Incorporated
27A14048 (Rev. 3)
Printed in U.S.A.



Surface Mount Microphones

Shure Microflex® MX391 Series microphones are small, surface-mounted electret condenser microphones designed for mounting on conference tables, stage floors, and lecterns. Their high sensitivity and wide frequency range make them especially suitable for picking up speech and vocals in sound reinforcement and recording applications.

- Flat frequency response across the vocal range for uncolored sound
- Interchangeable cartridges that provide a choice of polar pattern for each application
- Sleek, low-profile design for unobtrusive appearance
- RF filtering


Model Variations

Microflex MX391 microphones are available in black or white.


The polar pattern of the included cartridge is indicated by a model number suffix:

- /C Cardioid
- /S Supercardioid
- /O Omnidirectional
- /N Cartridge not included

Interchangeable Cartridges



Microflex microphones use interchangeable cartridges that allow you to choose the polar pattern for different installations.

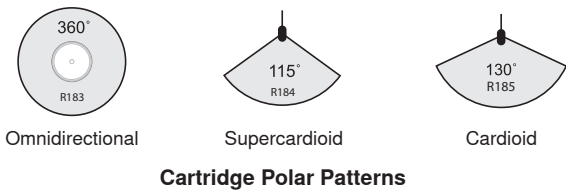


RFI Filtering

Important: Microphones must be used with the RK100PK and RK202PK plate-mounted preamp to optimize RF immunity.

Microphone Placement

For best low-frequency response and rejection of background noise, place the microphone on a large, flat surface, such as a floor, table, or lectern.


To reduce reverberance, avoid reflective surfaces above or to the side of the microphone, such as beveled sides of pulpits or overhanging shelves.

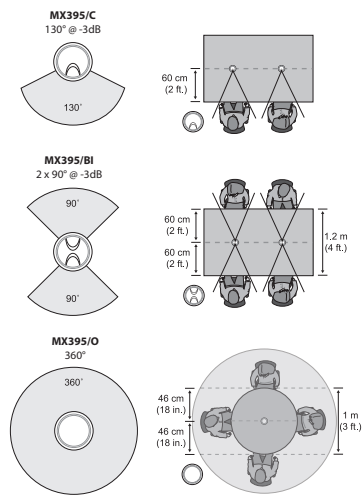

Permanent Installation

Permanent Installation


1. Remove grille.
2. Place housing in position and mark location of screw holes and bottom cable exit hole.
3. Drill starter hole for each screw and a 1/2 in. bottom exit hole for the mic cable.
4. Insert 4-pin mini-connector and cable through cable hole.
5. Replace grille with screw. Do not overtighten.



Do not attempt to detach the cable from the microphone, as damage may result.

Preamp Gain

If necessary, the preamplifier gain can be reduced by 12 dB. Contact an authorized Shure service center for information.

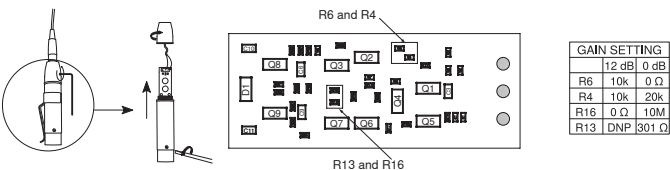

Specifications

All measurements taken with microphone mounted on a wooden surface (76 x 76 cm)

Cartridge Type

Electret Condenser

Frequency Response

50–17000 Hz

Polar Pattern

MX391/C	Cardioid
MX391/S	Supercardioid
MX391/O	Omnidirectional

Output Impedance

180 Ω

Output Configuration

Active Balanced

Sensitivity

@ 1 kHz, open circuit voltage

Cardioid	−30 dBV/Pa (33.5 mV)
Supercardioid	−28 dBV/Pa (38.5 mV)
Omnidirectional	−22 dBV/Pa (81.4 mV)

1 Pa=94 dB SPL

Maximum SPL

1 kHz at 1% THD, 1 kΩ load

Cardioid	119 dB
Supercardioid	118 dB
Omnidirectional	111 dB

Equivalent Output Noise

A-weighted

Cardioid	23 dB SPL
Omnidirectional	15 dB SPL
Supercardioid	21 dB

Signal-to-Noise Ratio

Ref. 94 dB SPL at 1 kHz

Cardioid	71 dB
Omnidirectional	80 dB
Supercardioid	73 dB

Dynamic Range

1 kΩ load, @ 1 kHz

96 dB

Common Mode Rejection

45 dB, minimum

Preamplifier Output Clipping Level

at 1% THD

−6 dBV (0.5 V)

Polarity


Positive sound pressure on diaphragm produces positive voltage on pin 2 relative to pin 3 of output XLR connector

Environmental Conditions

Operating Temperature	−18–57°C (0–135°F)
Storage Temperature	−29–74°C (−20–165°F)
Relative Humidity	0–95%

Power Requirements

11–52 V DC, 2.0 mA

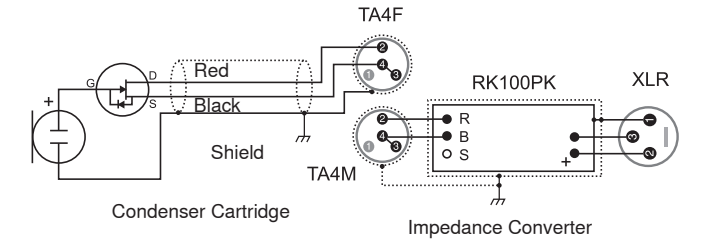

Microphone Wiring Diagram

Note: Yellowing of any plastic material can be caused from cigarette smoke, ultra violet rays, and other chemical interactions. Once plastic has yellowed, there typically is no cleaning method that will restore the whiteness.

Furnished Accessories

Carrying/Storage Bag	95A2313
RFI Resistant, Inline Preamp for all MX Models (Black)	RK100PK
Allen wrench (No. 4)	80A67

Replacement Parts

Black or White Omnidirectional Cartridge for all MX-(Microflex®) Models and WL183	R183B
Black or White Supercardioid Cartridge for all MX-(Microflex®) and WL183, WL184 and WL185 Models	R184B
Black or White Cardioid Cartridge for WL185 and all MX-(Microflex®) Models	R185B
RFI Resistant, Inline Preamp for all MX Models (Black)	RK100PK
RFI Resistant, Inline Preamp for all MX Models (White)	RK100PKW

Certifications



Meets essential requirements of all applicable European Directives.

Eligible for CE marking.



The CE Declaration of Conformity can be obtained from Shure Incorporated or any of its European representatives. For contact information please visit www.shure.com







The CE Declaration of Conformity can be obtained from: www.shure.com/europe/compliance

Authorized European representative:
Shure Europe GmbH
Headquarters Europe, Middle East & Africa
Department: EMEA Approval
Jakob-Dieffenbacher-Str. 12
75031 Eppingen, Germany
Phone: 49-7262-92 49 0
Fax: 49-7262-92 49 11 4
Email: info@shure.de

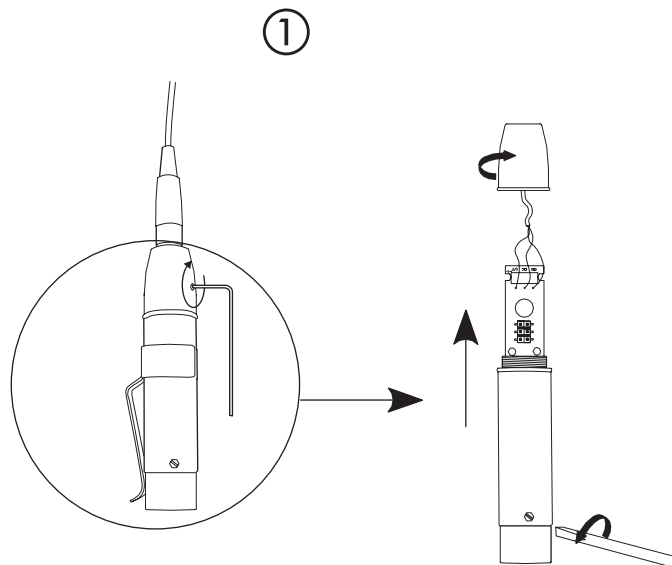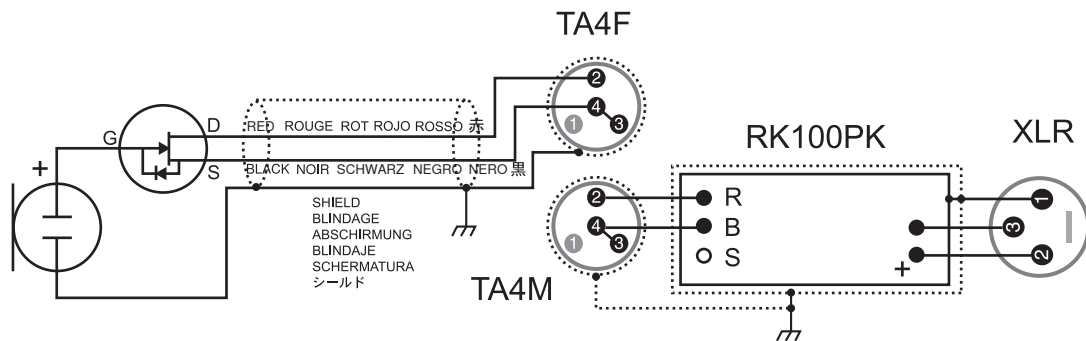

GAIN SETTING		
TABLE 4A • TABLEAU 4A		
TABELLE 4A • TABLA 4A		
TABELLA 4A		
	12 dB	0 dB
R6	10k	0 ohm
R4	10k	20k
R16	0 ohm	10M
R13	DNP	301 ohm

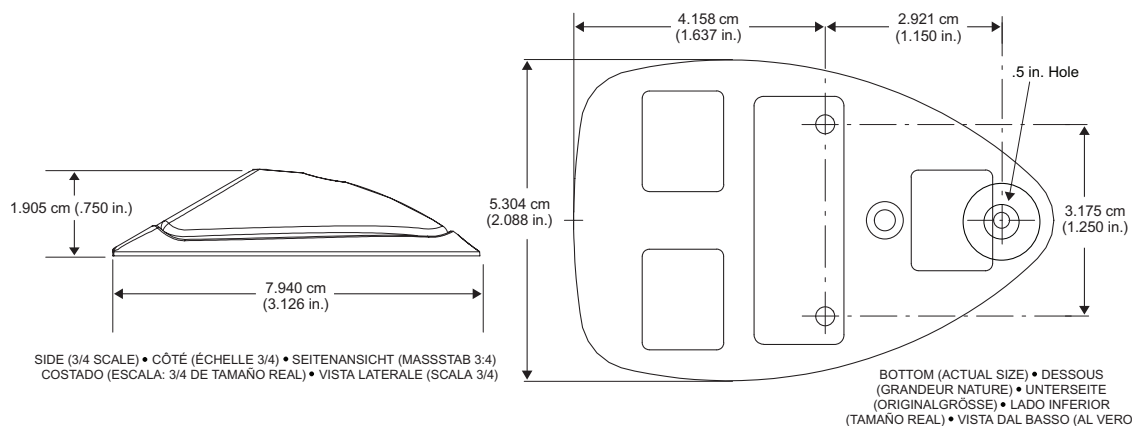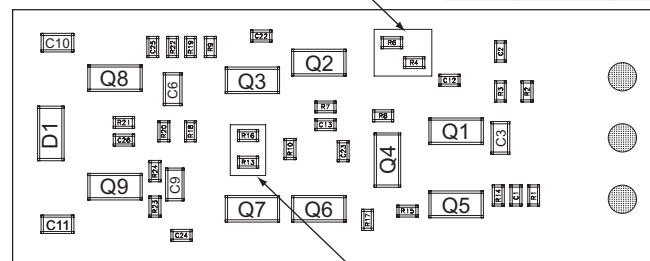

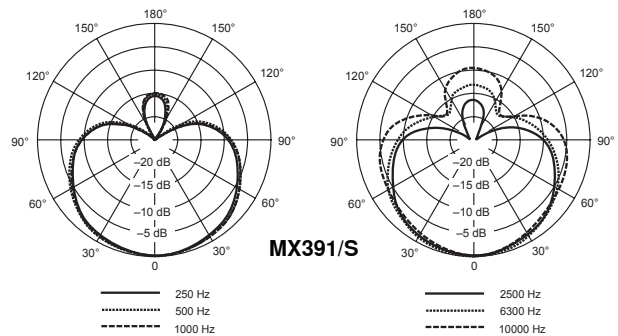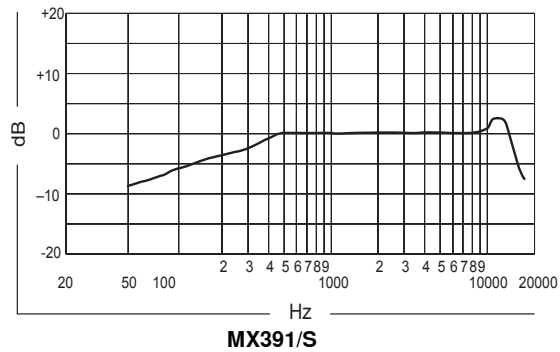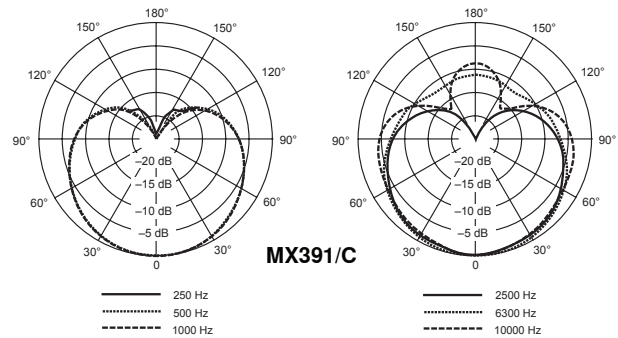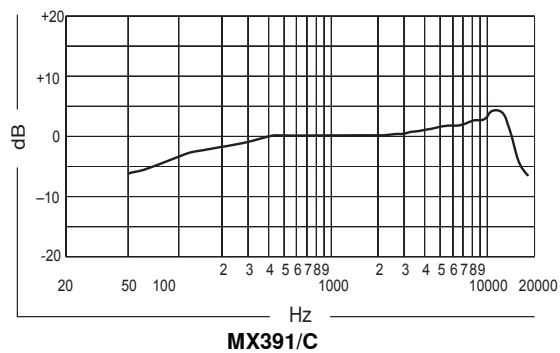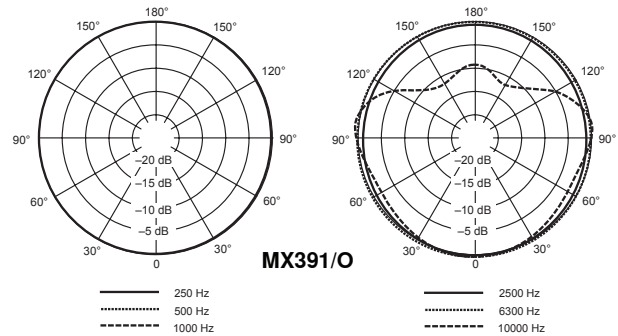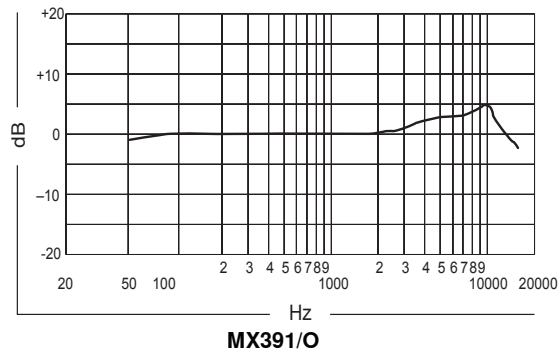



United States, Canada,
Latin America, Caribbean:
Shure Incorporated
5800 West Touhy Avenue
Niles, IL 60714-4608 USA

Phone: +1 847-600-2000
Fax: +1 847-600-1212 (USA)
Fax: +1 847-600-6446
Email: info@shure.com
www.shure.com

Europe, Middle East, Africa:
Shure Europe GmbH
Jakob-Dieffenbacher-Str. 12,
75031 Eppingen, Germany

Phone: +49-7262-92490
Fax: +49-7262-9249114
Email: info@shure.de
www.shure.eu

Asia, Pacific:
Shure Asia Limited
22/F, 625 King's Road
North Point, Island East
Hong Kong

Phone: +852-2893-4290
Fax: +852-2893-4055
Email: info@shure.com.hk
www.shureasia.com